

# PAR



## PAR20

**Energy saving bright, crisp white light. Superior optics for precise beam control, produces dramatic effects for accent and display lighting**

- Medium (E26) Base
- FL, NFL, WFL, SP or NSP Beam Spread
- 120V or 130V
- 2 1/2" Diameter
- 2500 Hours

Item	Watts	Lumens	MOL	Pkg
<b>35PAR20</b>	35	360	3.25	15
<b>50PAR20</b>	50	550	3.25	15
<b>75PAR20</b>	75	740	3.25	15



## PAR14

- 1.75" Diameter
- Ceramic neck
- 2500 Hours



## PAR16

- 2" Diameter
- 2500 Hours

Item	Watts	Lumens	MOL	Pkg
<b>35PAR14</b>	35	300	2.44	15
<b>45PAR16</b>	45	450	2.88	15
<b>60PAR16</b>	60	650	2.88	15
<b>75PAR16</b>	75	900	2.88	15



## PAR30

- Medium (E26) Base
- FL, NFL, WFL, SP or NSP Beam Spread
- 120V or 130V
- 3.75" Diameter
- 2500 Hours

Item	Watts	Lumens	MOL	Pkg
<b>50PAR30</b>	50	660	3.63	15
<b>60PAR30</b>	60	800	3.63	15
<b>75PAR30</b>	75	1050	3.63	15

**JOKE  
OF THE DAY!**

For the Topaz "Light Bulb Joke of the Day" just visit our website at [www.topaz-usa.com](http://www.topaz-usa.com)

If you think or hear of a good one, send it to us through our website. If it's chosen to appear in the web site, we'll include your name with the joke and give you a great reward!



## PAR30/Long Neck

- Extended Neck Length
- Medium (E26) Base
- FL, NFL, WFL, SP or NSP Beam Spread
- 120V or 130V

Item	Watts	Lumens	MOL	Pkg
<b>35PAR30/L</b>	35	450	4.63	15
<b>50PAR30/L</b>	50	660	4.63	15
<b>75PAR30/L</b>	75	1130	4.63	15



## PAR38

- 4.75" Diameter
- 120V or 130V
- FL, NFL, WFL, SP, or WSP Beam Spread
- Medium (E26) Base
- 2500 Hours

Item	Watts	Lumens	MOL	Pkg
<b>45PAR38/H</b>	45	560	5.30	15
<b>50PAR38/H</b>	50	650	5.30	15
<b>60PAR38/H</b>	60	850	5.30	15
<b>75PAR38/H</b>	75	1060	5.30	15
<b>90PAR38/H</b>	90	1310	5.30	15
<b>100PAR38/H</b>	100	1500	5.30	15
<b>120PAR38/H</b>	120	1800	5.30	15
<b>250PAR38/H</b>	250	3600	5.30	6



## PAR38/3 Side-Prong

- 4.75" Diameter
- 120V
- FL or SP Beam Spreads
- Medium Side-Prong Base

Item	Watts	Lumens	MOL	Pkg
<b>45PAR38/H/3</b>	60	770	5.30	15
<b>90PAR38/H/3</b>	90	1310	5.30	15



## PAR36 Screw Terminal

- 12V

Item	Watts	Base	Lumens	MOL	Pkg
<b>36PAR36/H</b>	36	SCREW TERMINAL	500	2.75	12
<b>50PAR36/H</b>	50	SCREW TERMINAL	700	2.75	12



## PAR56/64 Quartz

- 120V or 130V

Item	Watts	Base	Lumens	MOL	Pkg
<b>500PAR56/H</b>	500	MOG END PRONG	8000	5.0	6
<b>1000PAR64/H</b>	1000	EXT MOG END PRONG	19,400	6.0	6

# PAR Infrared

**Advanced infrared technology improves efficiency, lumen output and life**

- FL, NFL, WFL, SP, NSP or VNSP Beam Spread

**Halogen**



## PAR30 & PAR38

- 120V or 130V

Item	Watts	Base	Lumens	MOL	Pkg
<b>45PAR30/IR</b>	45	MED	680	3.30	15
<b>50PAR30/IR</b>	50	MED	900	3.30	15
<b>45PAR38/IR</b>	45	MED	800	5.30	15
<b>50PAR38/IR</b>	50	MED	850	5.30	15
<b>55PAR38/IR</b>	55	MED	850	5.30	15
<b>60PAR38/IR</b>	60	MED	1110	5.30	15
<b>70PAR38/IR</b>	70	MED	1260	5.30	15
<b>80PAR38/IR</b>	80	MED	1500	5.30	15
<b>90PAR38/IR</b>	90	MED	1470	5.30	15
<b>100PAR38/IR</b>	100	MED	2030	5.30	15

**GIVE  
US A  
CALL**

**BECOME A CUSTOMER  
BECOME A FRIEND**

New York Office **1.800.666.BULB**  
California Office **1.888.551.BULB**  
Florida Office **1.800.338.BULB**



**VISIT OUR  
NEW WEBSITE  
[WWW.TOPAZ-USA.COM](http://WWW.TOPAZ-USA.COM)**

## THE FACES OF TOPAZ



**Nancy Edwards**  
Credit Manager

*The reason I like working at Topaz is for the great working environment that Tim and Russ have created. What other company has kids running around, people swinging golf clubs all day and a plasma TV hanging from the wall?*





# Reflectors

## Aluminum - AR111

- G53 Base
- 12V
- FL25, SP8 or SSP4 Beam Spread

Item	Watts	MOL	Pkg
<b>35AR111</b>	35	2.38	6
<b>50AR111</b>	50	2.38	6
<b>75AR111</b>	75	2.38	6
<b>100AR111</b>	100	2.38	6



## BR30

- Medium (E26) Base
- 120V or 130V
- FL Beam Spread

Item	Watts	Lumens	MOL	Pkg
<b>65BR3030/H</b>	65	740	5.38	6



**AR70**

## Aluminum - AL12, AL18 & AR70

Item	Watts	Base	Volts	MOL	Pkg
<b>20AL12NSP6</b>	20	BA15D	12	1.50	50
<b>20AL12SP18</b>	20	BA15D	12	1.50	50
<b>20AL12FL34</b>	20	BA15D	12	1.50	50
<b>50AL18SP10</b>	50	BA15D	12	2.50	50
<b>50AL18WFL25</b>	50	BA15D	12	2.50	50
<b>20AR70SP</b>	20	BA15D	12	1.94	10
<b>20AR70FL</b>	20	BA15D	12	1.94	10
<b>50AR70SP</b>	50	BA15D	12	1.94	10
<b>50AR70FL</b>	50	BA15D	12	1.94	10



**AL18**



**AL12**

# Decorative

Halogen



## A19

- 120V or 130V

Item	Watts	Base	Lumens	MOL	Pkg
<b>42A19/H</b>	42	MED	570	4.30	12
<b>52A19/H</b>	52	MED	770	4.30	12
<b>72A19/H</b>	42	MED	1150	4.30	12



## BT15

- Medium (E26) Base
- 120V
- 3000 Hours

Item	Watts	MOL	Pkg
<b>60BT15/CL</b>	60	4.0	10
<b>60BT15/SW</b>	60	4.0	10
<b>75BT15/SW</b>	75	4.0	10
<b>100BT15/SW</b>	100	4.0	10
<b>150BT15/SW</b>	150	4.0	10



**ETC**



**CTC**

## Chandelier

- Clear or Frosted Finish

Item	Watts	Base	Pkg
<b>Q20CTC</b>	20	CAND (E12)	25
<b>Q35CTC</b>	35	CAND (E12)	25
<b>Q50CTC</b>	50	CAND (E12)	25
<b>Q20ETC</b>	20	MED (E26)	25
<b>Q35ETC</b>	35	MED (E26)	25
<b>Q50ETC</b>	50	MED (E26)	25



## T10

- Medium (E26) Base
- 120V or 130V
- Clear or Frosted Finish

Item	Watts	Pkg
<b>Q35T10</b>	35	15
<b>Q50T10</b>	50	15
<b>Q75T10</b>	75	15
<b>Q100T10</b>	100	15
<b>Q150T10</b>	150	15
<b>Q250T10</b>	250	15

# Quartz

## Single Ended - Mini-Can (E11)

- CC-8 Filament
- 120V or 130V
- Clear or Frosted Finish
- 2000 Hours
- T4 Bulb Type



Item	Watts	Lumens	MOL	Pkg
<b>Q20MC</b>	20	260	2.3	10/20
<b>Q35MC</b>	35	410	2.3	10/20
<b>Q50MC</b>	50	740	2.3	10/20
<b>Q75MC</b>	75	1200	2.7	10/20
<b>Q100MC</b>	100	1625	2.7	10/20
<b>Q150MC</b>	150	2270	2.8	10/20
<b>Q250MC</b>	250	4400	3.2	10/20
<b>Q400MC</b>	400	6700	3.8	10/20
<b>Q500MC</b>	500	8475	4.2	10/20

## Single Ended - Candelabra (E12)

- CC-8 Filament
- 120V or 130V
- Clear or Frosted Finish
- 2000 Hours
- T4 Bulb Type



Item	Watts	Lumens	MOL	Pkg
<b>Q20E12</b>	20	260	2.3	10/20
<b>Q35E12</b>	35	410	2.3	10/20
<b>Q50E12</b>	50	740	2.3	10/20
<b>Q75E12</b>	75	1200	2.7	10/20
<b>Q100E12</b>	100	1625	2.7	10/20

## Single Ended - Medium (E26)

- 120V or 130V
- Clear or Frosted Finish
- 2000 Hours
- JD Type



Item	Watts	Lumens	MOL	Pkg
<b>Q50E26</b>	50	740	2.3	10/20
<b>Q75E26</b>	75	1200	2.7	10/20
<b>Q100E26</b>	100	1625	2.7	10/20
<b>Q150E26</b>	150	2270	2.8	10/20
<b>Q250E26</b>	250	4400	3.2	10/20



## Single Ended – DC Bayonet (Ba15D)

- CC-8 Filament
- 120V or 130V
- Clear or Frosted Finish
- 2000 Hours
- T4 Bulb Type

Item	Watts	Lumens	MOL	Pkg
<b>Q20DC</b>	20	260	2.3	10/20
<b>Q35DC</b>	35	410	2.3	10/20
<b>Q50DC</b>	50	740	2.3	10/20
<b>Q75DC</b>	75	1200	2.7	10/20
<b>Q100DC</b>	100	1625	2.7	10/20
<b>Q150DC</b>	150	2270	2.8	10/20
<b>Q250DC</b>	250	4400	3.2	10/20
<b>Q500DC</b>	500	8475	4.2	10/20

**JOKE  
OF THE DAY!**

For the Topaz "Light Bulb Joke of the Day" just visit our website at [www.topaz-usa.com](http://www.topaz-usa.com)

If you think or hear of a good one, send it to us through our website. If it's chosen to appear in the web site, we'll include your name with the joke and give you a great reward!



## Single Ended – European (E14)

- CC-8 Filament
- 120V or 220V
- Clear or Frosted Finish
- 2000 Hours
- T4 Bulb Type

Item	Watts	Lumens	MOL	Pkg
<b>Q75E14</b>	75	1200	2.7	10/20
<b>Q100E14</b>	100	1625	2.7	10/20
<b>Q150E14</b>	150	2270	2.8	10/20
<b>Q250E14</b>	250	4400	3.2	10/20





## Double Ended – R7S Base

- T3 Design
- RSC - Recessed Single Contact
- 120V, 130V, 208V, 220V, 240V, 277V Options
- Clear or Frosted Finish
- 78mm, 118mm, 189mm, 256mm Length Options
- 2000 Hours

Item	Watts	Lumens	MOL	Pkg
<b>Q75T3/S</b>	75	1220	78MM	10
<b>Q75T3</b>	75	1220	118MM	10
<b>Q100T3/S</b>	100	1660	78MM	10
<b>Q100T3</b>	100	1660	118MM	10
<b>Q150T3/S</b>	150	2620	78MM	10
<b>Q150T3</b>	150	2620	118MM	10
<b>Q200T3/S</b>	200	3220	78MM	10
<b>Q200T3</b>	200	3220	118MM	10
<b>Q250T3/S</b>	250	3960	78MM	10
<b>Q250T3</b>	250	3960	118MM	10
<b>Q300T3/S</b>	300	5020	78MM	10
<b>Q300T3</b>	300	5020	118MM	10
<b>Q500T3</b>	500	9500	118MM	10
<b>Q1000T3</b>	1000	21,110	256MM	10
<b>Q1500T3</b>	1500	34,000	256MM	10



## Double Ended Infrared – R7S Base

**Advanced infrared technology improves efficiency, lumen output and life**

- 120V
- Clear Finish

Item	Watts	Lumens	MOL	Pkg
<b>Q225T3/HIR</b>	225	5750	118MM	10
<b>Q350T3/HIR</b>	350	9800	118MM	10
<b>Q900T3/HIR</b>	900	31,000	256MM	10

# Bi-Pin Quartz



## G4 Base

- Clear or Frosted Finish
- 6V, 12V or 24V
- 2000 Hours
- JC T3 Bulb Type

Item	Watts	Lumens	MOL	Pkg
<b>Q5G4</b>	5	50	1.3	10/50
<b>Q10G4</b>	10	110	1.3	10/50
<b>Q20G4</b>	20	300	1.3	10/50
<b>Q35G4</b>	35	540	1.3	10/50



## GY6.3 Base

- Clear or Frosted Finish
- 6V, 12V, 24V, 30V, 120V or 130V
- 2000 Hours
- JC T4 Bulb Type

Item	Watts	Lumens	MOL	Pkg
<b>Q20GY6</b>	20	180	1.6	10/50
<b>Q35GY6</b>	35	630	1.6	10/50
<b>Q50GY6</b>	50	875	1.6	10/50
<b>Q75GY6</b>	75	1400	1.6	10/50
<b>Q100GY6</b>	100	2040	1.6	10/50

Halogen



Just give us your order by 4 PM and in most cases, we will get your order out before 5 PM on the same day.



### G8 Base

- Clear or Frosted Finish
- 120V
- 2000 Hours

Item	Watts	Lumens	MOL	Pkg
<b>Q20G8</b>	20	180	1.8	10/50
<b>Q35G8</b>	35	430	1.8	10/50
<b>Q45G8</b>	45	680	1.8	10/50
<b>Q50G8</b>	50	760	1.8	10/50
<b>Q75G8</b>	75	1220	2.0	10/50
<b>Q100G8</b>	100	1950	2.0	10/50
<b>Q150G8</b>	150	3660	2.0	10/50



### G9 Base

- Clear or Frosted Finish
- 120V
- Double Loop Base Type
- 2000 Hours

Item	Watts	Lumens	MOL	Pkg
<b>Q20G9</b>	20	180	1.8	10/50
<b>Q35G9</b>	35	430	1.8	10/50
<b>Q45G9</b>	45	680	1.8	10/50
<b>Q50G9</b>	50	760	1.8	10/50
<b>Q75G9</b>	75	1220	2.0	10/50



We support you with neutral packaging. Topaz will not sell any Lamps and Lighting Products or Recessed Downlighting and Fixtures with the Topaz name to your customer or your customer's customer!

# MR Series

**Compact size for maximum versatility**  
**Precise optics for controlled beam management**



## MR8

- 1" Diameter
- 12V
- G4 Base
- Open or Covered Glass
- FL, NFL or SP Beam Spread
- Candle Power Determined by Beam Spread
- 2000 Hours


Item	Watts	MOL	Pkg
<b>MR8/5</b>	5	1.3	10/20
<b>MR8/10</b>	10	1.3	10/20
<b>MR8/20</b>	20	1.3	10/20
<b>MR8/35</b>	35	1.3	10/20



## MR11

- 1.37" Diameter
- 12V
- G4 Base
- Open or Covered Glass
- FL, NFL or SP Beam Spread
- Candle Power Determined by Beam Spread
- 2000 Hours

Item	Watts	MOL	Pkg
<b>MR11/5</b>	5	1.3	20
<b>MR11/10</b>	10	1.3	20
<b>MR11/20</b>	20	1.3	20
<b>MR11/35</b>	35	1.3	20



## MR11-DC

- 1.37" Diameter
- 12V
- Double Contact Bayonet Base
- Open or Covered Glass
- FL, NFL or SP Beam Spread
- Candle Power Determined by Beam Spread
- 2000 Hours

Item	Watts	MOL	Pkg
<b>MR11DC/20</b>	20	1.7	20
<b>MR11DC/35</b>	35	1.7	20





## MR16

- GU5.3 Base
- FL, NFL, WFL, VWFL, SP or NSP Beam Spread
- 12V
- Open or Covered Glass
- 2" Diameter
- 2000 Hours

Item	Watts	MOL	Pkg
<b>MR16/5</b>	5	1.8	20
<b>MR16/10</b>	10	1.8	20
<b>MR16/20</b>	20	1.8	20
<b>MR16/35</b>	35	1.8	20
<b>MR16/42</b>	42	1.8	20
<b>MR16/50</b>	50	1.8	20
<b>MR16/65</b>	65	1.8	20
<b>MR16/75</b>	75	1.8	20



## MR16CC - Consistent Color

- No Color Shift over lamp life
- GX5.3 Base
- FL, NFL, WFL, SP or NSP Beam Spread
- 12V
- Open or Covered Glass
- 2" Diameter
- 4000 Hours

Item	Watts	MOL	Pkg
<b>MR16CC/20</b>	20	1.8	20
<b>MR16CC/35</b>	35	1.8	20
<b>MR16CC/42</b>	42	1.8	20
<b>MR16CC/50</b>	50	1.8	20
<b>MR16CC/71</b>	71	1.8	20



## MR16 Colored Lens

- Red, Blue, Green, Orange, Yellow or Pink
- GX5.3 Base
- FL Beam Spread
- 12V
- 2" Diameter
- 2000 Hours

Item	Watts	MOL	Pkg
<b>MR16/50FL/COLORS</b>	50	1.8	20



## MR16BB & MR16SB

- Colored for specific Decorative requirements
- GX5.3 Base
- FL, NFL or SP Beam Spread
- 12V
- Open or Covered Glass
- 2" Diameter
- 2000 Hours



Item	Watts	MOL	Pkg
<b>MR16BB/20</b>	20	1.8	20
<b>MR16BB/35</b>	35	1.8	20
<b>MR16BB/50</b>	50	1.8	20
<b>MR16SB/20</b>	20	1.8	20
<b>MR16SB/35</b>	35	1.8	20
<b>MR16SB/50</b>	50	1.8	20

## THE FACES OF TOPAZ



**Nick Toscano**  
Sales Representative

I started at Topaz over ten years ago and I like working here because of the family atmosphere. Talking to customers is enjoyable because there is always a story behind why they need certain products. It certainly keeps things interesting.



## MR16IR

- Infrared Reflective Coating
- 2" Diameter
- 12V
- GX5.3 Base
- Covered Glass for use in Open Fixtures
- FL, NFL or SP Beam Spread
- Longer 3000 Hour Life

Item	Watts	MOL	Pkg
<b>MR16IR/20</b>	20	1.8	20
<b>MR16IR/35</b>	35	1.8	20
<b>MR16IR/45</b>	45	1.8	20
<b>MR16IR/50</b>	50	1.8	20



## MR16 4K & 5K

- 2" Diameter
- 12V
- GX5.3 Base
- Open Glass
- FL Beam Spread
- Whiter Light for more specific applications
- 2000 Hours

Item	Watts	MOL	Pkg
<b>MR16/20FL/4K</b>	20	1.8	20
<b>MR16/20FL/5K</b>	20	1.8	20
<b>MR16/35FL/4K</b>	35	1.8	20
<b>MR16/35FL/5K</b>	35	1.8	20
<b>MR16/50FL/4K</b>	50	1.8	20
<b>MR16/50FL/5K</b>	50	1.8	20



## MR16TAL Twist & Lock Consistent Color

- 2" Diameter
- 12V
- Twist and Lock Base
- Open Glass
- FL, NFL or SP Beam Spread
- No Color Shift over Lamp Life
- 2000 Hours

Item	Watts	MOL	Pkg
<b>MR16TAL/35</b>	35	2.0	20
<b>MR16TAL/50</b>	50	2.0	20





## MR16DC

- 2" Diameter
- 12V
- Double Contact Bayonet Base
- Open or Covered Glass
- FL, NFL or SP Beam Spread
- 2000 Hours

Item	Watts	MOL	Pkg
<b>MR16DC/20</b>	20	2.0	20
<b>MR16DC/35</b>	35	2.0	20
<b>MR16DC/50</b>	50	2.0	20



## MR16 Off-Voltage

- 2" Diameter
- 6V or 24V
- GU5.3 Base
- Open or Covered Glass
- FL or SP Beam Spread

Item	Watts	MOL	Pkg
<b>MR16/20/6V</b>	20	1.8	20
<b>MR16/20/24V</b>	20	1.8	20
<b>MR16/35/6V</b>	35	1.8	20
<b>MR16/35/24V</b>	35	1.8	20
<b>MR16/50/6V</b>	50	1.8	20
<b>MR16/50/24V</b>	50	1.8	20




## MR16JDR

- Ceramic Neck
- 2" Diameter
- 120V
- Intermediate (E17) or Medium (E26) Base
- Covered Glass
- FL or SP Beam Spread

Item	Watts	MOL	Pkg
<b>MR16JDR/35/E26</b>	35	2.8	20
<b>MR16JDR/50/E26</b>	50	2.8	20
<b>MR16JDR/75/E26</b>	75	2.8	20
<b>MR16JDR/75/E17</b>	75	2.8	20
<b>MR16JDR/100/E26</b>	100	2.8	20
<b>MR16JDR/100/E17</b>	100	2.8	20



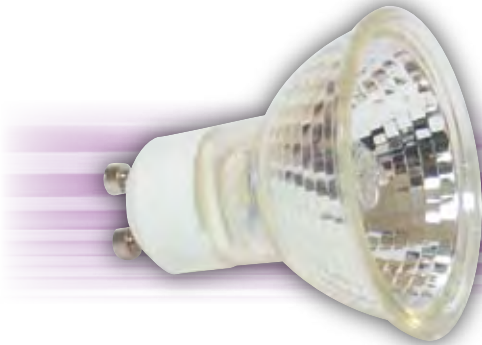

## MR16 – Line Voltage (120V)

- 2" Diameter
- 120V
- Open or Covered Glass
- FL Beam Spread

Item	Watts	Base	MOL	Pkg
<b>MR16/20FL/GX5.3</b>	20	GX5.3	1.8	20
<b>MR16/35FL/GX5.3</b>	35	GX5.3	1.8	20
<b>MR16/50FL/GX5.3</b>	50	GX5.3	1.8	20
<b>MR16/75FL/GX5.3</b>	75	GX5.3	1.8	20
<b>MR16/20FL/GY6.3</b>	20	GY6.3	1.8	20
<b>MR16/35FL/GY6.3</b>	35	GY6.3	1.8	20
<b>MR16/50FL/GY6.3</b>	50	GY6.3	1.8	20
<b>MR16/75FL/GY6.3</b>	75	GY6.3	1.8	20
<b>MR16/20FL/G8</b>	20	G8	1.8	20
<b>MR16/35FL/G8</b>	35	G8	1.8	20
<b>MR16/50FL/G8</b>	50	G8	1.8	20
<b>MR16/75FL/G8</b>	75	G8	1.8	20
<b>MR16/20FL/GU10</b>	20	GU10	1.8	20
<b>MR16/35FL/GU10</b>	35	GU10	1.8	20
<b>MR16/50FL/GU10</b>	50	GU10	1.8	20
<b>MR16/75FL/GU10</b>	75	GU10	1.8	20

**GIVE  
US A  
CALL**

**BECOME A CUSTOMER  
BECOME A FRIEND**

New York Office **1.800.666.BULB**

California Office **1.888.551.BULB**

Florida Office **1.800.338.BULB**



**VISIT OUR  
NEW WEBSITE  
WWW.TOPAZ-USA.COM**