



A-Type

A19

Most common general purpose lamp

- Medium (E26) Brass or Aluminum Base
- Clear, Inside Frosted or Soft White Finish
- 120V or 130V
- Also available in 12V, 24V, 42V, 220V, 250V or 277V
- Attractive 4-Bulb Packaging

Item	Watts	Lumens	Hours	MOL	Pkg
25A19	25	190	2500	4.00	120
40A19	40	505	1000	4.43	120
60A19	60	865	1000	4.43	120
75A19	75	1190	750	4.43	120
100A19	100	1710	750	4.43	120



A15

Appliance and Fan

- 120V or 130V
- Clear or Inside Frosted Finish
- Attractive 4-Bulb Packaging

Item	Watts	Lumens	Hours	MOL	Pkg
15A15	15	115	2500	3.5	120
25A15	25	210	1100	3.5	120
30A15	30	215	5000	3.5	120
40A15	40	350	1500	3.5	120
60A15	60	650	1500	3.5	120



A21 & A23

Long-Neck

- 120V or 130V
- Clear or Inside Frosted Finish
- Attractive Individual Packaging

Item	Watts	Lumens	Hours	MOL	Pkg
75A21	75	1190	750	4.5	120
100A21	100	1680	750	4.5	120
150A21	150	2850	750	4.5	120
200A21	200	3760	750	4.5	60
100A23	100	1680	750	5.93	120
150A23	150	2850	750	5.93	120
200A23	200	3030	1000	5.93	60



PS25 & PS30

**Pear-shaped utility,
general illumination**

- Medium (E26) Base
- Clear or Inside Frosted Finish
- 120V or 130V

Item	Watts	Lumens	Hours	MOL	Pkg
150PS25	150	2330	750	3.12	60
300PS25	300	6200	750	6.93	60
200PS30	200	3540	750	8.06	60
300PS30	300	6100	1000	8.06	60



PS35 & PS52

**Pear-shaped utility,
general illumination**

- Mogul (E39) Base
- Clear or Inside Frosted Finish
- 120V or 130V

Item	Watts	Lumens	Hours	MOL	Pkg
300PS35	300	5700	1000	9.38	24
500PS35	500	8170	1000	9.38	24
750PS52	750	17040	1000	9.5	12
1000PS52	1000	23740	1000	9.5	6



Energy-Saving

**Reduced wattage
replaces standard incandescents
Up to 10% Savings**

- Medium (E26) Brass or Aluminum Base
- Clear or Inside Frosted Finish
- Standard or Extended-Life
- 120V or 130V
- Attractive 4-Bulb Packaging

Item	Watts	Replaces	Bulb	Lumens	Hours	Pkg
40A34	34	40W	A19	380	1000	120
60A52	52	60W	A19	730	1000	120
75A67	67	75W	A19	1030	1000	120
100A90	90	100W	A19	1465	1000	120
150A135	135	150W	A21	2380	1000	120
40A34/XL	34	40W	A19	360	2500	120
60A52/XL	52	60W	A19	640	2500	120
75A67/XL	67	75W	A19	910	2500	120
100A90/XL	90	100W	A19	1260	2500	120
150A135/XL	135	150W	A21	2060	2500	120



3-Way

**1 Bulb,
3 Light Levels
For use
in table lamps**

- Soft White Finish

Item	Watts	Bulb	Lumens Max	Hours	Pkg
30/100SW	30-70-100	A19	1300	1500	12
50/150SW	50-100-150	A21	2155	1500	12
50/250SW	50-200-250	A21	3955	1500	12
100/300SW	100-200-300	PS35	4620	1500	12



Left Hand Thread

**Theft protection
for temporary
lighting
and hospitality
industry**

- Inside Frosted Finish
- Medium Reversed Thread Base
- 120V

Item	Watts	Bulb	Lumens	Hours	Pkg
100A/LHT	100	A19	1750	750	120
150A/LHT	150	A23	2850	750	60



Extended-Life

Used where greater intervals between lamping is required

- Medium (E26) Brass Base
- Clear or Inside Frosted Finish
- 130V
- Attractive 4-Bulb Packaging

5,000 Hours

Item	Watts	Bulb	Lumens	MOL	Pkg
25A/5M	25	A19	195	4.43	120
40A/5M	40	A19	310	4.43	120
60A/5M	60	A19	600	4.43	120
75A/5M	75	A19	825	4.43	120
100A/5M	100	A19	1250	4.43	120
150A/5M	150	A21	2850	5.31	120
200A/5M	200	A23	4010	5.88	60
300A/5M	300	PS25	6000	6.93	60

10,000 Hours

Item	Watts	Bulb	Lumens	MOL	Pkg
40A/10M	40	A19	290	4.43	120
60A/10M	60	A19	595	4.43	120
75A/10M	75	A19	850	4.43	120
100A/10M	100	A19	1190	4.43	120
150A/10M	150	A21	1890	5.31	120
200A/10M	200	A23	3640	5.88	60

20,000 Hours

Item	Watts	Bulb	Lumens	MOL	Pkg
60A/20M	60	A19	575	4.43	120
75A/20M	75	A19	880	4.43	120
100A/20M	100	A19	1130	4.43	120
150A/20M	150	A21	1800	5.31	120
200A/20M	200	A23	2575	5.88	60



Rough Service

Durable filaments, for use in harsh environments

- Medium (E26) Brass or Aluminum Base
- Inside Frosted Finish
- 120V or 130V
- Attractive 4-Bulb Packaging

Item	Watts	Bulb	Lumens	Pkg
25A/RS	25	A19	190	120
40A/RS	40	A19	400	120
50A/RS	50	A19	500	120
60A/RS	60	A19	575	120
75A/RS	75	A19	750	120
100A/RS	100	A19	1260	120
150A/RS	150	A23	1770	60
200A/RS	200	A23	2650	48
300A/RS	300	PS35	5700	24



Colored

Transparent Party & Ceramic Colors for a variety of applications

- Amber, Blue, Green, Pink, or Red
- Medium (E26) Brass Base
- 130V
- Attractive 4-Bulb Packaging

Item	Watts	Bulb	Hours	Pkg
15A15/CERAMIC	15	A15	4000	120
15A15/TRANSPARENT	15	A15	4000	120
25A19/CERAMIC	25	A19	4000	120
25A19/TRANSPARENT	25	A19	4000	120
40A19/CERAMIC	40	A19	4000	120
40A19/TRANSPARENT	40	A19	4000	120
60A19/CERAMIC	60	A19	4000	120
60A19/TRANSPARENT	60	A19	4000	120



Bug

Yellow color will not attract insects

- Medium (E26) Brass or Aluminum Base
- 120V or 130V
- Attractive 4-Bulb Packaging

Item	Watts	Bulb	Hours	Pkg
25A/BUG	25	A19	4000	120
40A/BUG	40	A19	4000	120
60A/BUG	60	A19	4000	120
100A/BUG	100	A19	4000	120



Traffic Signal

- Medium (E26) Base
- 120V or 130V
- Clear Finish
- 8,000 Hours

Item	Watts	Bulb	Lumens	Pkg
67A21/TS	67	A21	635	120
69A21/TS	69	A21	675	120
116A21/TS	116	A21	1280	120
135A21/TS	135	A21	1750	120

Incandescent

**JOKE
OF THE DAY!**

For the Topaz "Light Bulb Joke of the Day" just visit our website at www.topaz-usa.com

If you think or hear of a good one, send it to us through our website. If it's chosen to appear in the web site, we'll include your name with the joke and give you a great reward!



Silvered Bowl

Reduced glare applications

- Medium (E26) Base
- Clear or Inside Frosted Finish
- 2,000 Hours

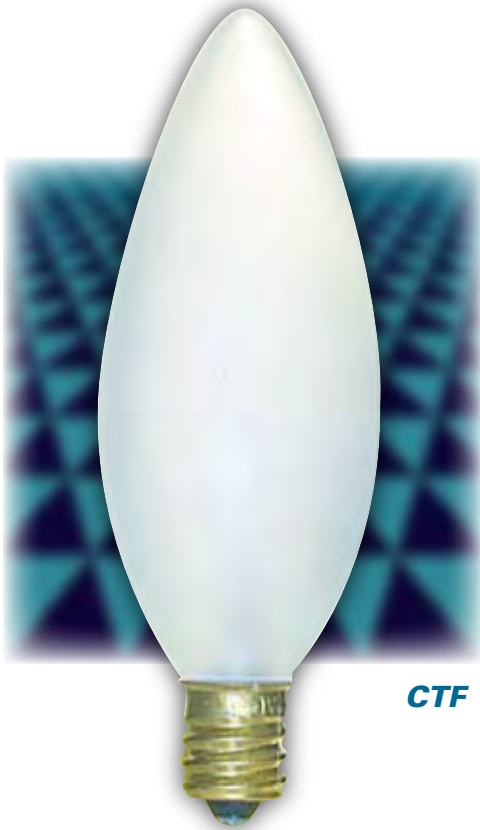
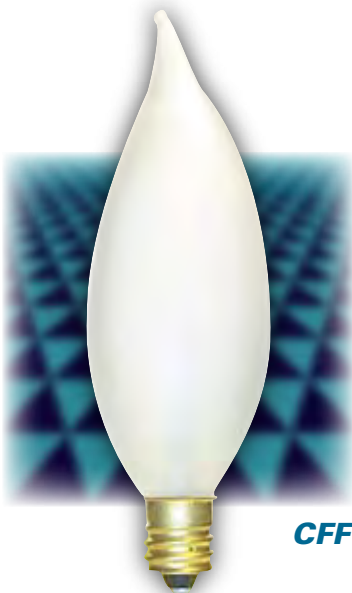
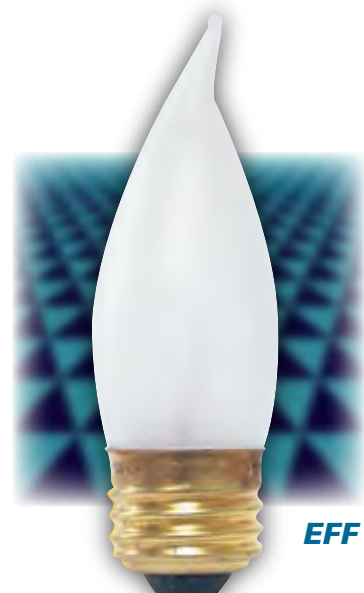
Item	Watts	Bulb	Finish	Pkg
40A19/SB/IF	40	A19	FROST	120
60A19/SB/IF	60	A19	FROST	120
60A19/SB	60	A19	CLEAR	120
60G25/SB	60	G25	CLEAR	120
100A21/SB/IF	100	A21	FROST	120
150PS25/SB/IF	150	PS25	FROST	120

Decorative

Chandelier

**A wide selection
for your decorative fixture needs**

- Candelabra (E12) or Edison (E26) Brass Base
- Torpedo or Flame Tip
- Clear or Frosted Finish
- Petite size available
- 130V
- 3,000 Hours
- 15W, 25W, 40W, or 60W
- Attractive Individual Packaging suitable for POP displays
- 25/500 Master Pack

**CTF****CFF****ETF****EFF**



G40

Globe

For use in makeup, vanity and pendent fixtures

- 5" Diameter
- Medium (E26) Brass Base
- Clear or White Finish
- 3,000 Hours
- 130V
- Attractive Individual Packaging

Item	Watts	Lumens	Pkg
25G40	25	220	24
40G40	40	372	24
60G40	60	595	24
100G40	100	1100	24
150G40	150	1770	24



G25

- 3" Diameter
- Medium (E26) Brass Base
- Clear or White Finish
- 3,000 Hours
- 130V
- Attractive Individual Packaging

Item	Watts	Lumens	Pkg
25G25	25	235	25/100
40G25	40	460	25/100
60G25	60	775	25/500



G16.5

- 2" Diameter
- Candelabra (E12) Brass Base
- Clear or White Finish
- 3,000 Hours
- 130V
- Attractive Individual Packaging

Item	Watts	Lumens	Pkg
15G16.5	15	130	25/500
25G16.5	25	200	25/500
40G16.5	40	300	25/500
60G16.5	60	540	25/500


G12

Other Globes

Item	Watts	Diameter	Base	Pkg
10G12	10	1.50	CAND (E12)	25
25G18	25	1.50	MED (E26)	25
40G18	40	1.50	MED (E26)	25
40G30	40	3.25	MED (E26)	25
60G30	60	3.25	MED (E26)	25


G18

G30

F15

Fiesta

- 130V
- Clear, Amber or White Finish
- Brass Base
- 3,000 Hours
- Attractive Individual Packaging

Item	Watts	Base	MOL	Pkg
15F10	15	CAND (E12)	3.06	25
25F10	25	CAND (E12)	3.06	25
25F15	25	MED (E26)	4.37	25
40F15	40	MED (E26)	4.37	25
60F15	60	MED (E26)	4.37	25


F10

F10

Reflectors

Incandescent

BR30 and BR40

The most popular choice for indoor downlighting

- Medium (E26) Brass or Aluminum Base
- 120V or 130V
- Flood or Spot
- Attractive Individual Packaging



BR30

Item	Watts	Lumens	Hours	MOL	Pkg
45BR30	45	485	2000	5.37	24
50BR30	50	525	2000	5.37	24
65BR30	65	755	2000	5.37	24
65BR30/5M	65	740	5000	5.37	24
65BR30/20M	65	720	20,000	5.37	24
85BR30	85	855	2500	5.37	24



BR40

Item	Watts	Lumens	Hours	MOL	Pkg
65BR40	65	730	2000	6.50	24
75BR40	75	710	5000	6.50	24
85BR40	85	930	2000	6.50	24
90BR40	90	1000	2000	6.50	24
100BR40	100	935	2000	6.50	24
120BR40	120	1450	2000	6.50	24
120BR40/20M	120	1490	2000	6.50	24
200BR40	200	1950	5000	6.50	24
300BR40	300	3030	2500	6.50	24



R20

R14, R16, & R20

All purpose utility and task lighting

- 120V or 130V
- Brass or Aluminum Base

Item	Watts	Base	Lumens	Hours	MOL	Pkg
25R14N	25	INT (E17)	152	1500	2.50	25
25R14	25	MED (E26)	152	2000	2.08	25
40R14N	40	INT (E17)	370	1500	2.50	25
40R14	40	MED (E26)	370	2000	2.08	25
40R16	40	MED (E26)	370	1500	3.37	25
30R20	30	MED (E26)	210	3000	3.90	25
50R20	50	MED (E26)	440	3000	3.90	25
75R20	75	MED (E26)	700	3000	3.90	25

THE FACES OF TOPAZ



Travis Hebb
Inside Sales

The work environment at Topaz is second to none. The team we have all work hard and have excellent Customer Service skills. Our customers are all incredible and easy to work with which makes my job fun and rewarding.



R14



R16

GIVE US A CALL

**BECOME A CUSTOMER
BECOME A FRIEND**

New York Office **1.800.666.BULB**
California Office **1.888.551.BULB**
Florida Office **1.800.338.BULB**



ER30

Elliptical Reflector

Elliptical shape improves lumen output and efficiency

- Medium (E26) Brass or Aluminum Base
- 120V or 130V
- 2000 Hours

Item	Watts	Lumens	MOL	Pkg
50ER30	50	350	6.38	24
75ER30	75	580	6.38	24
120ER40	120	1370	7.38	24



BR38

Indoor/outdoor directional lighting

- 1-piece construction
- Thermal-shock resistant glass
- 120V or 130V
- Medium (E26) Brass or Aluminum Base
- Flood or Spot

Item	Watts	Lumens	Hours	MOL	Pkg
75BR38	75	600	5000	5.25	24
100BR38	100	1000	5000	5.25	24
150BR38	150	1400	5000	5.25	24
150BR38/20	150	1200	20,000	5.25	24

FullFill™

We are well known for the depth and breadth of our inventory. Our promise to you is that we can fill over 99% of the orders we receive from existing inventory.

Heat Lamps

Direct heat source for use in food prep, bathrooms and poultry industry

- Clear or Red-Faced (Infrared)
- 120V or 130V
- Medium (E26) Brass or Aluminum Base
- Attractive Individual Packaging



Item	Watts	Finish	Hours	MOL	Pkg
125BR40/1	125	CLEAR	5000	6.50	24
175PAR38/1	175	CLEAR	5000	5.30	24
175PAR38/10	175	RED	5000	5.30	24
250BR40/1	250	CLEAR	5000	6.50	24
250R40/10	250	RED	5000	6.50	24
375R40/1	375	CLEAR	5000	7.25	24
375R40/10	375	RED	5000	7.25	24

THE FACES OF TOPAZ



Marc Schwartz
Regional Sales Manager

Working for Topaz has allowed me to develop great friendships with co-workers and customers alike. It's always exciting to experience our growth in this dynamic market, while continuing our commitment to excellent customer service.



GIVE US A CALL

**BECOME A CUSTOMER
BECOME A FRIEND**

New York Office **1.800.666.BULB**
California Office **1.888.551.BULB**
Florida Office **1.800.338.BULB**

Colored Reflectors

Directional, mood and accent lighting for dramatic effect

- Amber, Blue, Green, Pink, Red or Yellow
- Indoor or Outdoor Weatherproof Application
- Medium (E26) Base
- 120V or 130V
- Attractive Individual Packaging



Indoor

Item	Watts	Hours	MOL	Pkg
30R20/COLORS	30	2000	3.90	25
50R20/COLORS	50	2000	3.90	25
65BR30/COLORS	65	2000	5.30	24
120BR40/COLORS	120	2000	6.50	24
50R20/PLANT	50	2000	3.90	24
65BR30/PLANT	65	2000	5.30	24
75BR20/PLANT	75	2000	3.90	24
120BR40/PLANT	120	2000	6.50	24



Outdoor

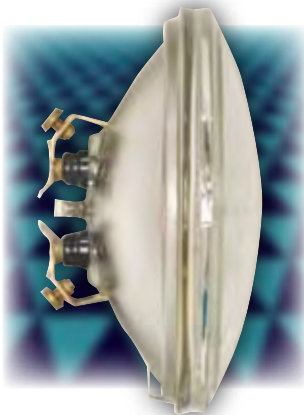
Item	Watts	Hours	MOL	Pkg
90PAR38H/COLORS	90	3000	5.30	24
100BR38/COLORS	100	5000	5.30	24
150PAR38/COLORS	150	2000	5.30	24





Side Prong (PAR3 Plug-in)

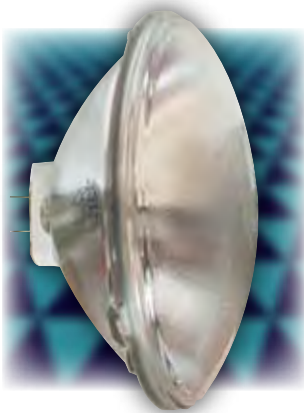
Item	Watts	Lumens	Hours	Pkg
65PAR38/3	65	675	2000	12
75PAR38/3	75	765	2000	12
90PAR38H/3	90	1350	2500	12
120PAR38/3	120	1370	2000	12
150PAR38/3	150	1740	2000	12
200PAR46/3	200	2270	2000	12



Screw Terminal

- 12V
- VNSP, NSP, WFL, VWFL
Beam Spreads

Item	Watts	Lumens	Hours	Pkg
36PAR36H	36	500	4000	12
50PAR36H	50	330	2000	12
50PAR36H	50	700	4000	12



Side Prong (PAR3 Plug-in)

- VNSP, NSP, WFL, VWFL
Beam Spreads

Item	Watts	Lumens	Hours	Pkg
200PAR56	200	2700	2000	12
300PAR56	300	3840	2000	12
500PAR64	500	6500	2000	12



C7



S11



S14



S6

Specialty

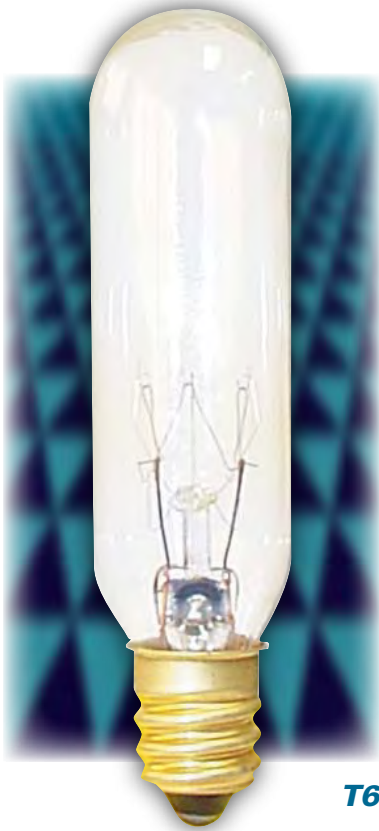
Nightlight, Sign, Indicator, Exit, Appliance Applications

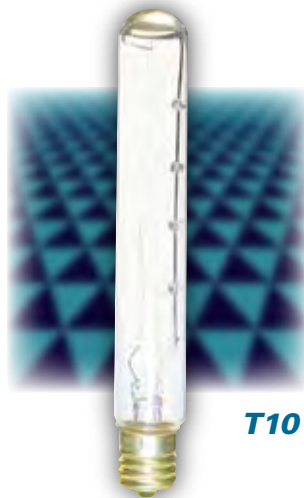
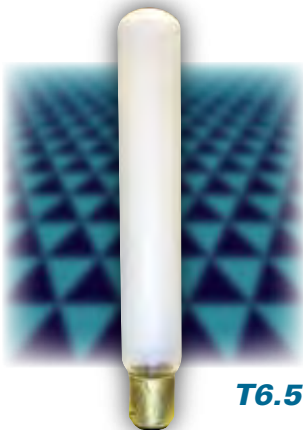
- Blue, Green, Orange, Red, Yellow, Pink, Clear or White
- 130V

Item	Watts	Base	Hours	MOL	Pkg
4C7	4	CAND (E12)	5000	2.10	25
4C7/COLOR	4	CAND (E12)	5000	2.10	25
7C7	7	CAND (E12)	5000	2.10	25
7C7/COLOR	7	CAND (E12)	5000	2.10	25
7C9	7	INT (E17)	5000	2.10	25
7C9/COLOR	7	INT (E17)	5000	2.10	25
7.5S11	7.5	MED (E26)	3500	2.25	25
7.5S11/COLOR	7.5	MED (E26)	3500	2.25	25
10S11	10	INT (E17)	5000	2.25	25
10S11/COLOR	10	INT (E17)	5000	2.25	25
25S11N	25	INT (E17)	5000	2.25	25
40S11N	40	INT (E17)	5000	2.25	25
11S14	11	MED (E26)	3000	3.50	120
11S14/COLOR	11	MED (E26)	3000	3.50	120
6S6	6	CAND (E12)	1500	1.88	25
6S6/COLOR	6	CAND (E12)	1500	1.88	25


Tubular

**Specific applications include:
showcase, exit signs, appliance
and accent.**


T6

T8

T10

T6.5

Item	Watts	Base	Lumens	MOL	Pkg
15T6	15	CAND (E12)	102	3.06	25
15T6DC	15	DC	102	3.06	25
20T6.5N	20	INT (E17)	90	5.50	25
20T6.5DC	20	DC	90	5.50	25
25T6.5N	25	INT (E17)	220	5.56	25
25T6.5DC	25	DC	220	5.56	25
40T6.5N	40	INT (E17)	420	5.50	25
40T6.5DC	40	DC	420	5.50	25
15T7	15	CAND (E12)	100	2.25	25
15T7N	15	INT (E17)	100	2.25	25
15T7DC	15	DC	100	2.25	25
15T8	15	CAND (E12)	100	2.25	25
15T8N	15	INT (E17)	100	2.25	25
15T8DC	15	DC	100	2.25	25
25T8	25	CAND (E12)	200	2.62	25
25T8N	25	INT (E17)	200	2.63	25
25T8DC	25	DC	200	2.63	25
40T8	40	MED (E26)	430	11.75	25
25T10	25	MED (E26)	260	5.63	25
40T10	40	MED (E26)	440	5.63	25
60T10	60	MED (E26)	740	5.63	25
L30	30	DISC	210	17.75	24
L30W	30	DISC	210	17.75	24
L40	40	DISC	325	11.75	24
L40W	40	DISC	325	11.75	24
L60	60	DISC	480	17.75	24
L60W	60	DISC	480	17.75	24
LN60	60	S14S	460	19.70	25
LN150	150	S14S	930	39.40	16


LN150

L60